


CARTRIDGE

6.5 Grendel - 123/125 grain

Version 8.0

Nosler®

UP FRONT

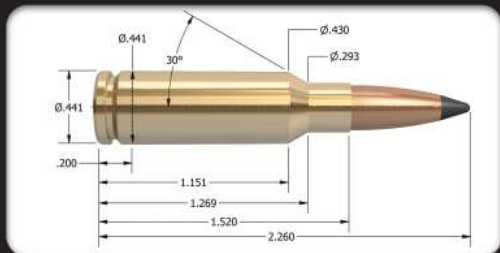

6.5 Grendel - 123/125 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	123gr. HPBT	2.250"	0.510	0.252
Partition®	125gr. Spitzer	2.240"	0.449	0.256

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	30.0	Gr. WATER	BARREL Length/Make
		BARREL Twist	24" Pac-Nor
			1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15	28.0 * MAX.	2398	97%
	27.0	2305	94%
	26.0	2212	90%
IMR 4895	28.0 * MAX.	2414	** 103%
	27.0	2346	99%
	26.0	2278	95%
IMR 8208 XBR Most Accurate Powder Tested	27.0 MAX.	2420	99%
	26.0 *	2324	95%
	25.0	2228	92%
TAC	27.5 MAX.	2438	94%
	26.5 *	2334	90%
	25.5	2230	87%
A-2520	28.5 * MAX.	2484	98%
	27.5	2392	95%
	26.5	2302	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load